MDE/MDG28PR

MODELLI DA ESPORTAZIONE MDE/MDG2PN

MAYTAG® COMMERCIAL ASCIUGATRICE SUPER CAPIENTE

LA LEGGENDARIA AFFIDABILITÀ MAYTAG

Ottimizziamo il vostro investimento in attrezzature da oltre mezzo secolo.



Designed for non-coin usage as well as compatible with most card readers.



CONTROLLO MICROPROCESSORE

Maytag® Computer Trac® i comandi sono facili da programmare e utilizzare. Inoltre, offrono ai proprietari la flessibilità di impostare i prezzi di vendita in base al giorno e all'ora.

PER I NOSTRI CONSUMATORI:

Capacità extra-large di 6,7 piedi cubi (190 litri)

- Selezione dei cicli facile da usare con un solo tocco
- Flusso d'aria elevato per una migliore cura dei capi
- Display con indicazione del tempo rimanente
- Ampia finestra per una maggiore praticità
- Non è necessario portare con sé monete
- Conforme alle norme ADA senza piedistallo opzionale

PER I NOSTRI OPERATORI:

- Tecnologia TurboVent™ Dryer: prestazioni migliori su condotti di ventilazione lunghi
- I controlli avanzati Computer Trac® consentono una facile programmazione
- Accesso frontale per un self-service più semplice
- Sistema di controllo Accu Trac® con comunicazione dati bidirezionale
- Filtro per lanugine in rete metallica di grande capacità
- Compatibile con lettore di schede
- Porta reversibile con apertura laterale

CARATTERISTICHE BUILT-TO-LAST™:

- Piano in porcellana smaltata con alzatina
- Sospensione a quattro rulli con cuscinetti lubrificati in modo permanente
- La protezione del ventilatore riduce gli interventi di assistenza
- La migliore garanzia del settore: 5 anni su tutte le parti

LAUNDRY SOLUTIONS YOU CAN DEPEND ON.

ASCIUGATURA PIÙ RAPIDA CON LA TECNOLOGIA TURBOVENT™ DRYER

visit www.mittica.it/
o chiama 3396981519

IL NOSTRO IMPEGNO
PER UNA QUALITÀ AFFIDABILE

Noi di Maytag crediamo che i beni durevoli debbano rimanere tali. Ecco perché ogni prodotto Maytag® è realizzato con materiali di altissima qualità e con la massima precisione artigianale. È anche per questo che garantiamo le nostre attrezzature con un servizio di assistenza e supporto affidabile fornito dai nostri fornitori professionali di prodotti per la lavanderia Maytag. In poche parole, quando scegliete i prodotti Maytag®, vi assicurate la massima tranquillità.



MDE/MDG28PR

MAYTAG® COMMERCIAL ASCIUGATRICE SUPER CAPIENTE


Maytag® Commercial Super-Capacity Dryer

CONTROLLI A MICROPROCESSORE, PREDISPOSTI PER LETTORE DI CARTE O FUNZIONAMENTO SENZA MONETE

DRYER SPECIFICATIONS	
MODEL	MDE/MDG25PR
EXPORT MODEL	MDE/MDG25PN
MOTOR	
Single-phase, thermoprotected against overload, auto-reset	Yes
HP (kw)	⅓(.25)
Tumble speed—RPM	50 ± 1
CAPACITY	
Cu. ft. (liters)	6.7 (190)
DOOR OPENING DIAMETER	
Sq. in.	191
AIRFLOW	
Gas models—cfm (cmm)	230 (6.5)
Electric models—cfm (cmm)	215 (6.1)
SOUND LEVEL (export model only)	
Sound pressure level, Lpa (dbA) (Kpa: +/- 10dbA)	58
ELECTRICAL REQUIREMENTS	
MDE model—voltage	240V/60Hz
MDG model—voltage	120V/60Hz
Export models (PN)—voltage	220–240V/50Hz
BREAKER/FUSE MIN. REQUIREMENTS	
MDE model—amps	30
MDG model—amps	15
MDE export model (PN)—amps	20
MDG export model (PN)—amps	10
ELECTRIC HEATING ELEMENT	
Domestic models—watts	5,600
Export models (PN)—watts	4,600
Canadian models—watts	5,250
GAS RATING	
MDG model—BTU/hr. (kcal/hr.)	24,000 (6,048)
MDG export model—BTU/hr. (kcal/hr.)	20,000 (5,040)
EXHAUST DUCT DIAMETER	
In. (mm)	4 (100)*
ELECTRONIC BURNER IGNITION	
MDG model	Yes
GAS INLET	
MDG model—in.	⅜ N.P.T.
ADJUSTABLE LEVELING LEGS	Yes
APPROXIMATE WEIGHT	
Crated—lbs. (kg) electric/gas	144 (65)/147 (67)
Uncrated—lbs. (kg) electric/gas	133 (60)/136 (62)
DIMENSIONS	
Width—in. (mm)	27 (686)
Depth—in. (mm)	29 (737)
Height—in. (mm)	39.25 (997)
OPTIONAL PEDESTAL ADDS:	
Height—in. (mm)	2.75 (70)

* Use 4" (100 mm) diameter rigid aluminum or galvanized steel duct. Never use plastic, nonmetal or combustible duct.

See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

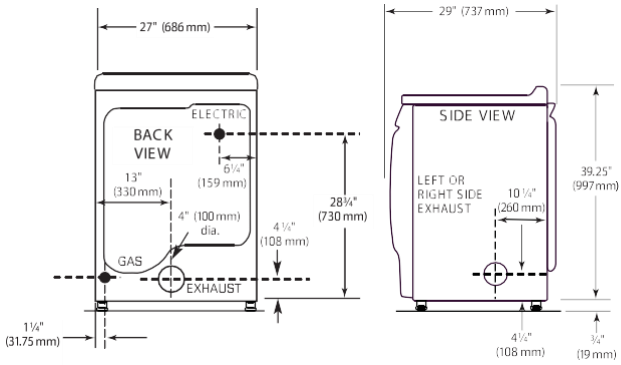

MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

Number Of 90° Turns



Rigid Metal Vent

	Box Hood and Louvered Style	Angled Hood Style
0	135 ft. (41.2 m)	129 ft. (39.3 m)
1	125 ft. (38.1 m)	119 ft. (36.3 m)
2	115 ft. (35.1 m)	109 ft. (33.2 m)
3	106 ft. (32.3 m)	100 ft. (30.5 m)
4	98 ft. (29.9 m)	92 ft. (28.0 m)

Flexible Metal Vent

	Box Hood and Louvered Style	Angled Hood Style
0	76 ft. (23.2 m)	62 ft. (18.9 m)
1	71 ft. (21.6 m)	57 ft. (17.4 m)
2	67 ft. (20.4 m)	53 ft. (16.2 m)
3	65 ft. (19.8 m)	51 ft. (15.6 m)
4	63 ft. (19.2 m)	49 ft. (14.9 m)

NEW YORK CITY M.E.A.

BEAB Approved

THE BEST WARRANTY IN THE BUSINESS—
5 YEARS ON ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.