SINGLE-LOAD FRONT-LOAD WASHERS - 60 Hz

MHN33



SISTEMA DI TRASMISSIONE DURACORE

Il sistema di trasmissione DuraCore è progettato e testato per funzionare per 15.000 cicli*

- Guarnizione a triplo labbro flessibile e a tenuta stagna con molla a giarrettiera che mantiene l'umidità lontana dall'albero, proteggendo i cuscinetti di alta qualità
- Il manicotto dell'albero resistente è progettato per eliminare l'usura dell'albero




CONTROLLI INTELLIGENTI CON TECNOLOGIA SERIE M

- Offre flessibilità e opzioni di prezzo personalizzate per ogni ciclo, per guadagni ottimali
- La selezione dei cicli con un solo tocco consente agli utenti finali di scegliere facilmente il programma di lavaggio preferito
- La diagnostica integrata contribuisce a semplificare gli interventi di assistenza



TECNOLOGIA ADVANCED SPIN

- Garantisce tempi di ciclo più uniformi**
- Offre un bilanciamento automatico del carico grazie a una sospensione a sei punti che assicura una stabilità ottimale per l'intera unità di lavaggio



CONTRIBUTO PER DURARE

- Pannello di accesso frontale: facile da rimuovere, semplifica la manutenzione consentendo un rapido accesso ai componenti interni
- Cerniera della porta in pressofusione per impieghi gravosi: si apre a 180° ed è progettata per resistere alle sollecitazioni delle lavanderie commerciali
- Accelerometro: rileva con precisione le vibrazioni del mobile e consente alla lavatrice di superare i limiti di velocità di centrifuga finali
- Dispenser di sapone resistente: la sua robustezza aumenta la durata complessiva della macchina



COIN DROP EQUIPPED
MHN33PDCWW (pictured)



CANADA COIN DROP EQUIPPED
MHN33PDCXW (pictured)



CARD READER READY & NON-VEND
MHN33PRCWW (pictured)

SINGLE-LOAD FRONT-LOAD WASHER MODELS — 60Hz	
PAYMENT CONFIGURATION	MODEL NUMBER
Coin Drop Equipped	MHN33PDCWW MHN33PDCXW - CAN
Card Reader Ready & Non-Vend	MHN33PRCWW

7 YEAR 5 LIMITED WARRANTY
MAYTAG® COMMERCIAL LAUNDRY

ENERGY STAR

AMERICA
AN AMERICAN COMPANY FOR OVER 100 YEARS

See maytagcommerciallaundry.com for warranty details.


*Based on 11 lb load, 24 cycle check cycle, Wash 3-4
**Compared to previous model, MHN30, based on 17 lb load.

®/™ © 2020 Maytag. All rights reserved.
MY200020 5/20

SINGLE-LOAD FRONT-LOAD WASHERS - 60 Hz

MHN33

SIDE VIEW

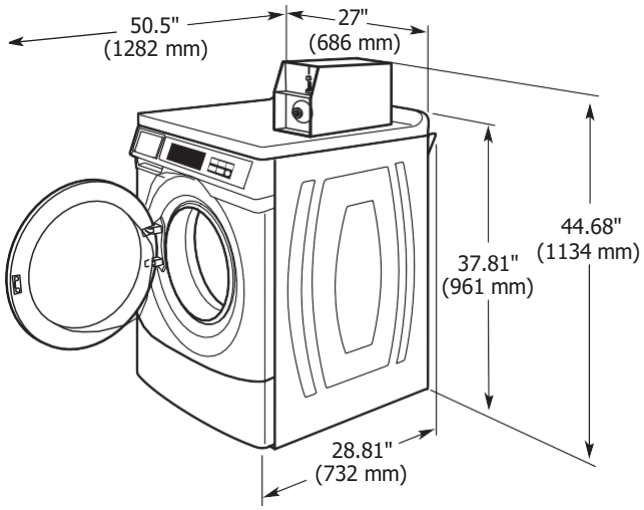

MODELS	MHN33 (PD)	MHN33 (PR)
PAYMENT CONFIGURATION	COIN DROP EQUIPPED	CARD READER READY/NON-VEND
CAPACITY		
Cylinder Volume – cu. ft. (liters)	3.1 (88)	3.1 (88)
Cylinder Diameter – in. (mm)	21.6 (547)	21.6 (547)
Cylinder Depth – in. (mm)	13.4 (341)	13.4 (341)
DIMENSIONS		
Depth – in. (mm)	28.81 (732)	28.81 (732)
Width – in. (mm)	27 (686)	27 (686)
Height – in. (mm)	44.68 (1,134)*	37.81 (961)
Door Opening – in. (mm)	14.25 (362)	14.25 (362)
CRATED DIMENSIONS		
Crated Width – in. (mm)	29 (736.6)	29 (736.6)
Crated Depth – in. (mm)	33-½ (850.9)	33-½ (850.9)
Crated Height – in. (mm)	48 ½ (1,231.9)	40 ½ (1,028.7)
APPROXIMATE WEIGHT		
Uncrated – lb (kg)	245 (111)	235 (107)
Crated – lb (kg)	254 (115)	244 (111)
ELECTRICAL REQUIREMENTS		
Voltage	120V	120V
Breaker/Fuse – Amps	15	15
WATER INLET HOSE/DRAIN HOSE		
Operating Pressure – psi (bar)	20-100 (1-8)	20-100 (1-8)
Inlet Hose Length – ft (m)	4 (1.22)	4 (1.22)
Drain Hose Length – ft (m)	6 (1.83)	6 (1.83)
APPROXIMATE WATER USAGE		
Average Total Water Usage Per Cycle – gallons (liters)	10.71 (40.50)**	10.71 (40.50)**
Average Hot Water Usage Warm Water Cycle – gallons (liters)	.71 (2.69)	.71 (2.69)
Average Hot Water Usage Hot Water Cycle – gallons (liters)	2.71 (10.26)	2.71 (10.26)
Integrated Water Factor (IWF)	3.5	3.5
Modified Energy Factor (MEF)	2.2	2.2
Energy Star® Certified	Yes	Yes
Extract Speed – Max G-Force/Max RPM	300/1,000	300/1,000
Motor Size – hp (kW)	½ (.37)	½ (.37)
ADA Compliant (with optional pedestal)	Yes	Yes

*Includes height of metercase.

**Based on 2018 United States DOE J2 Testing with factory preset cycles.

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice

®/™ © 2020 Maytag. All rights reserved.
MY200020 5/20